

POLL ***Q38**

88-036846/08

***DD-249-688-A**

Load supporting equipment for factory crane - is hollow beam with central crane hook connector between load carrying cross members


VEB POLYGRAPH LEIPZIG 05.06.86-DD-290973

(16.09.87) B66c-01/16

05.06.86 as 290973 (349RW)

A hollow beam has a central connection for the lifting hook of the crane. At each end is a forked support secured by a bolt passing through a hole in the beam. Both sides of the support projects a cross member, connected so that a minimum height is required. This has a connector at each end.

USE - Load handling device of minimum height enabling a crane installed in a warehouse or factory to be used effectively.
(Dwg.No.1)
N88-027887

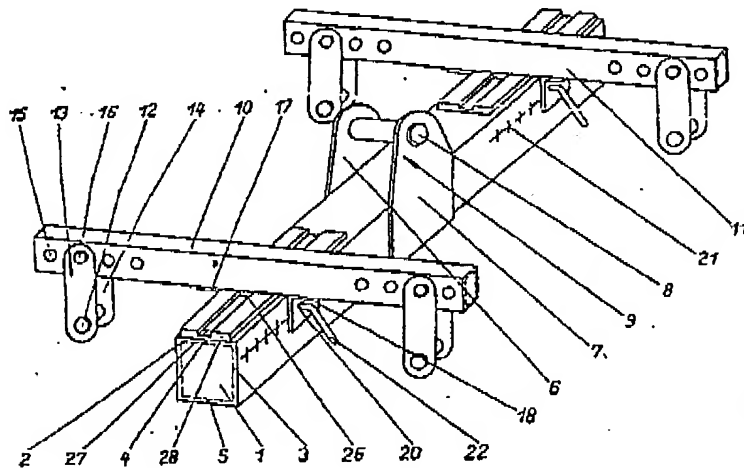


© 1988 DERWENT PUBLICATIONS LTD.

128, Theobalds Road, London WC1X 8RP, England



US Office: Derwent Inc.

DAILEY 300, 6045 ELM ST. MCLEOD, VA 22101

Unauthorised copying of this abstract not permitted.

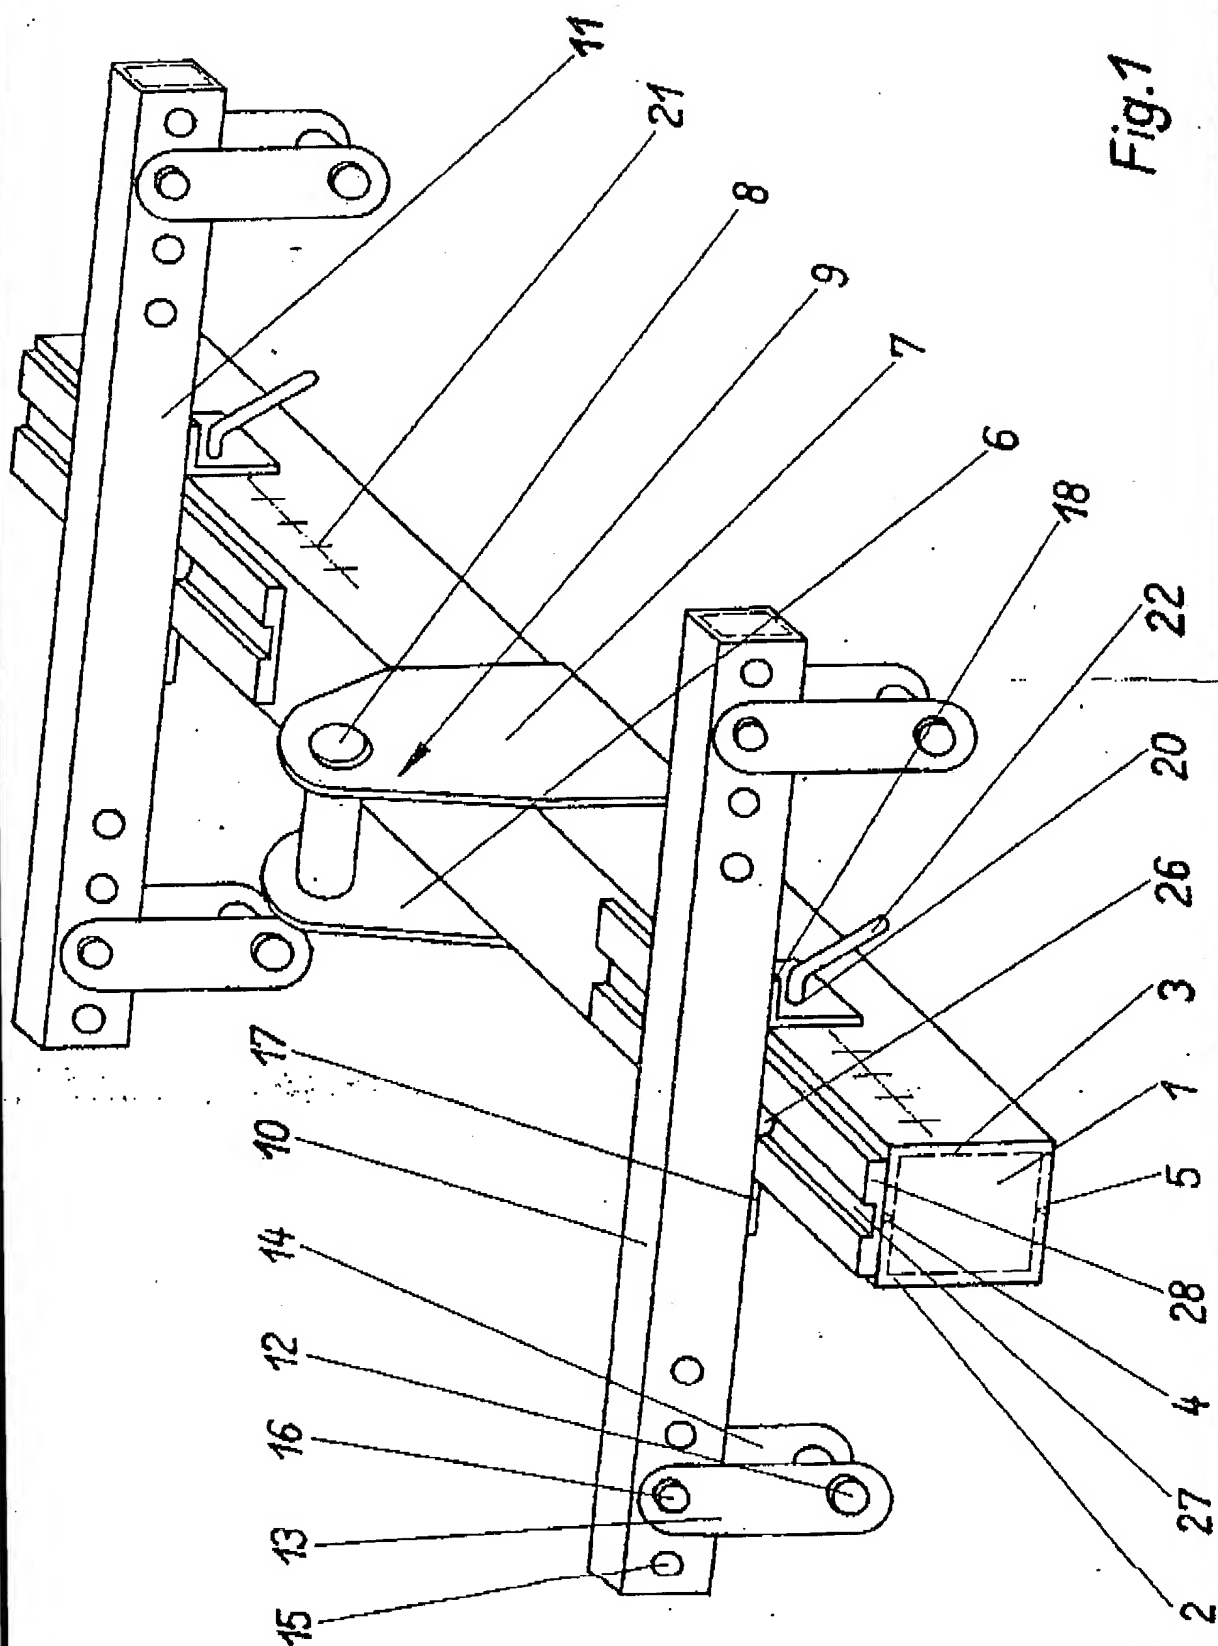

11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28

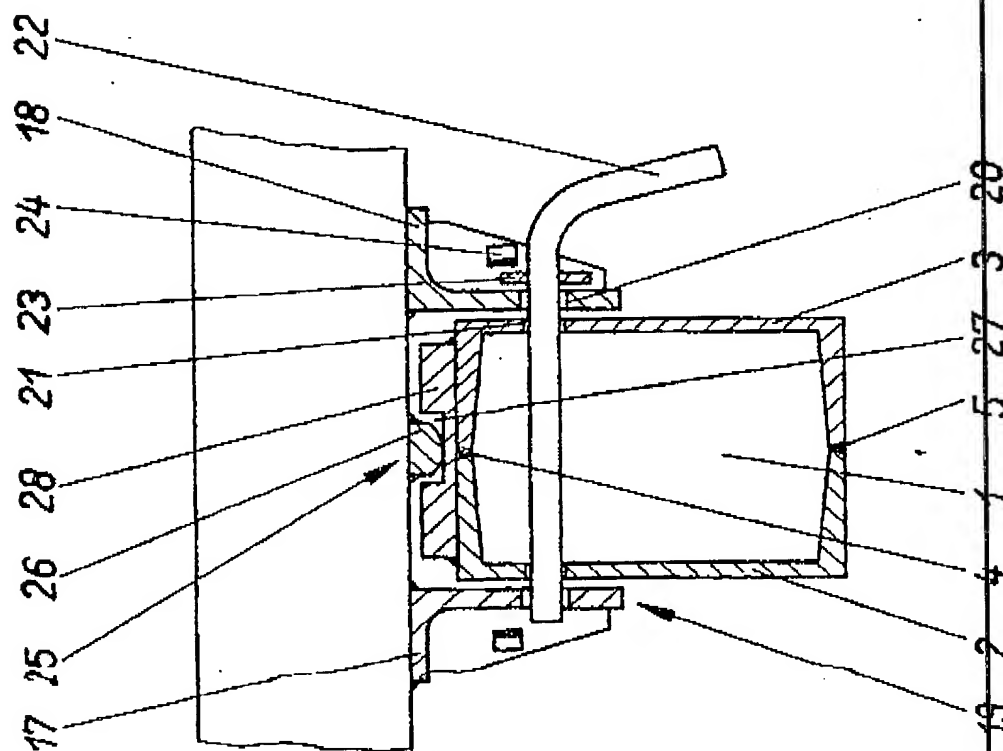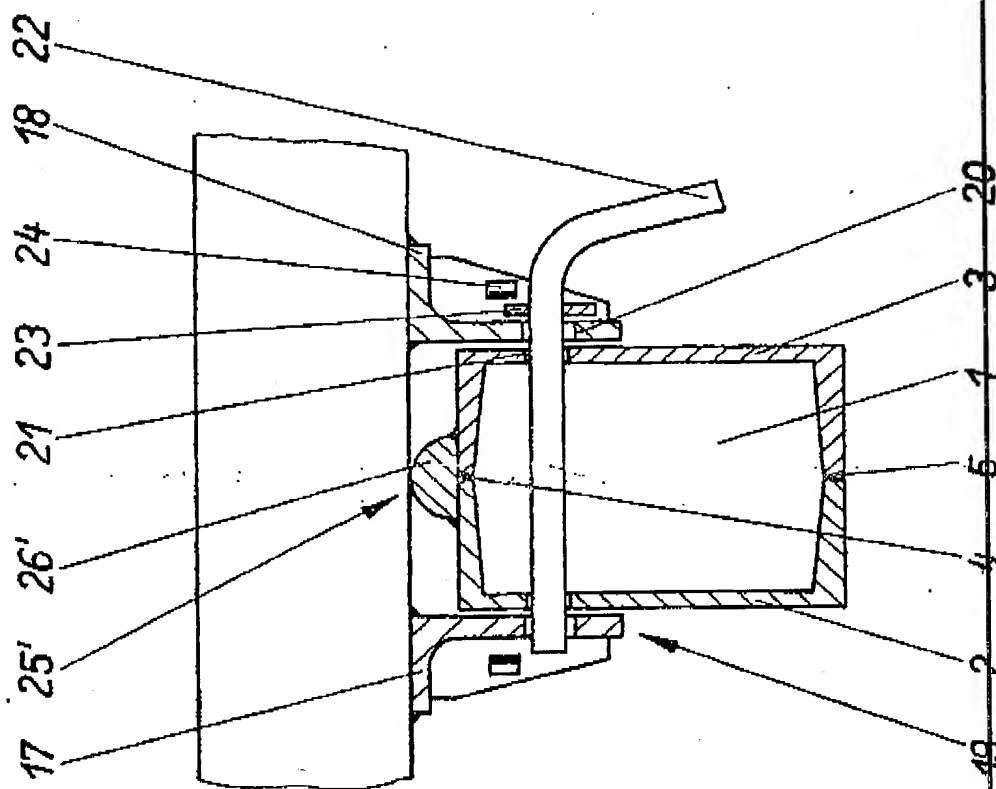

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.